


Power + or hot

Next Board

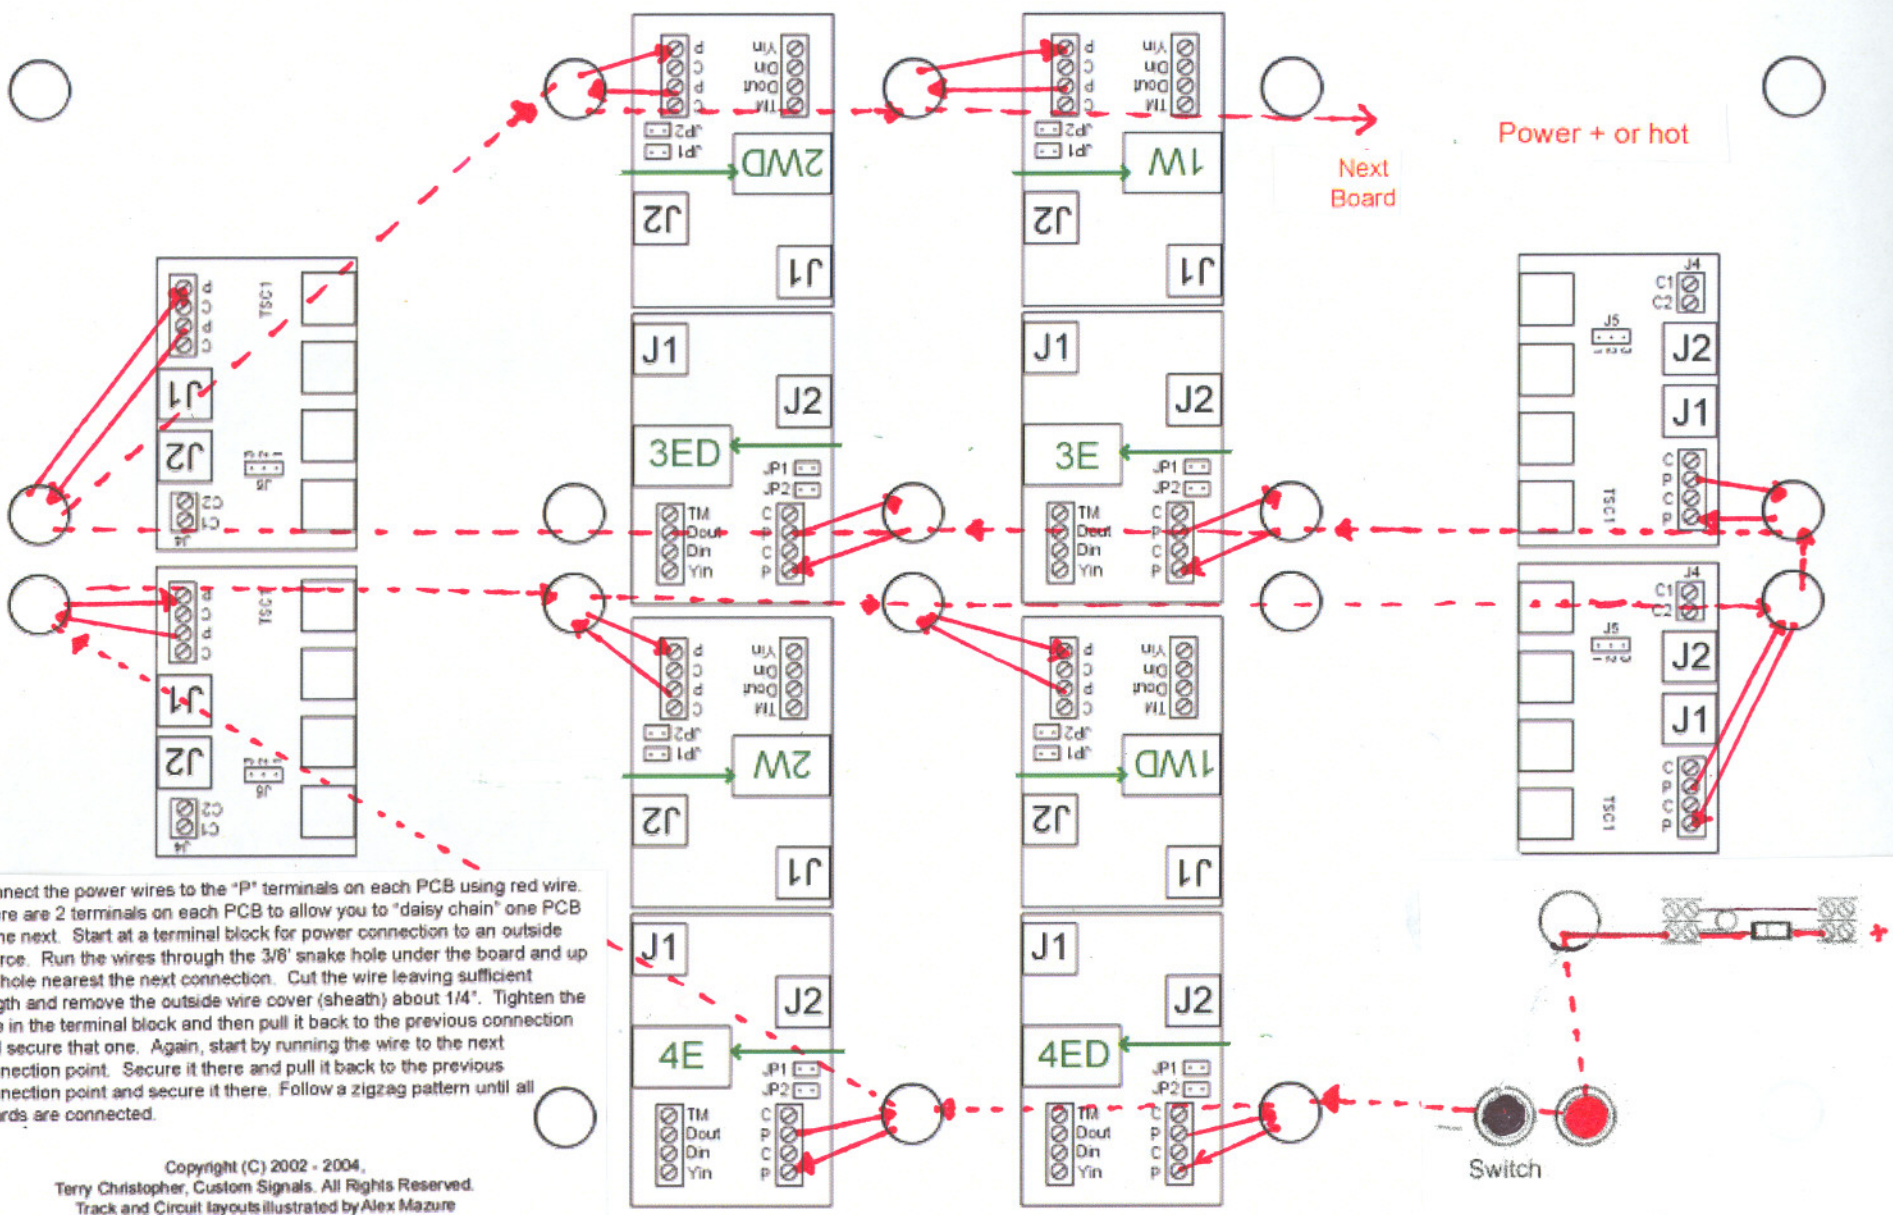

Connect the power wires to the "P" terminals on each PCB using red wire. There are 2 terminals on each PCB to allow you to "daisy chain" one PCB to the next. Start at a terminal block for power connection to an outside source. Run the wires through the 3/8" snake hole under the board and up the hole nearest the next connection. Cut the wire leaving sufficient length and remove the outside wire cover (sheath) about 1/4". Tighten the wire in the terminal block and then pull it back to the previous connection and secure that one. Again, start by running the wire to the next connection point. Secure it there and pull it back to the previous connection point and secure it there. Follow a zigzag pattern until all boards are connected.