
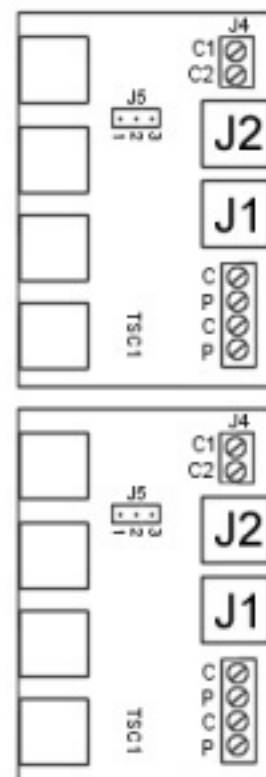
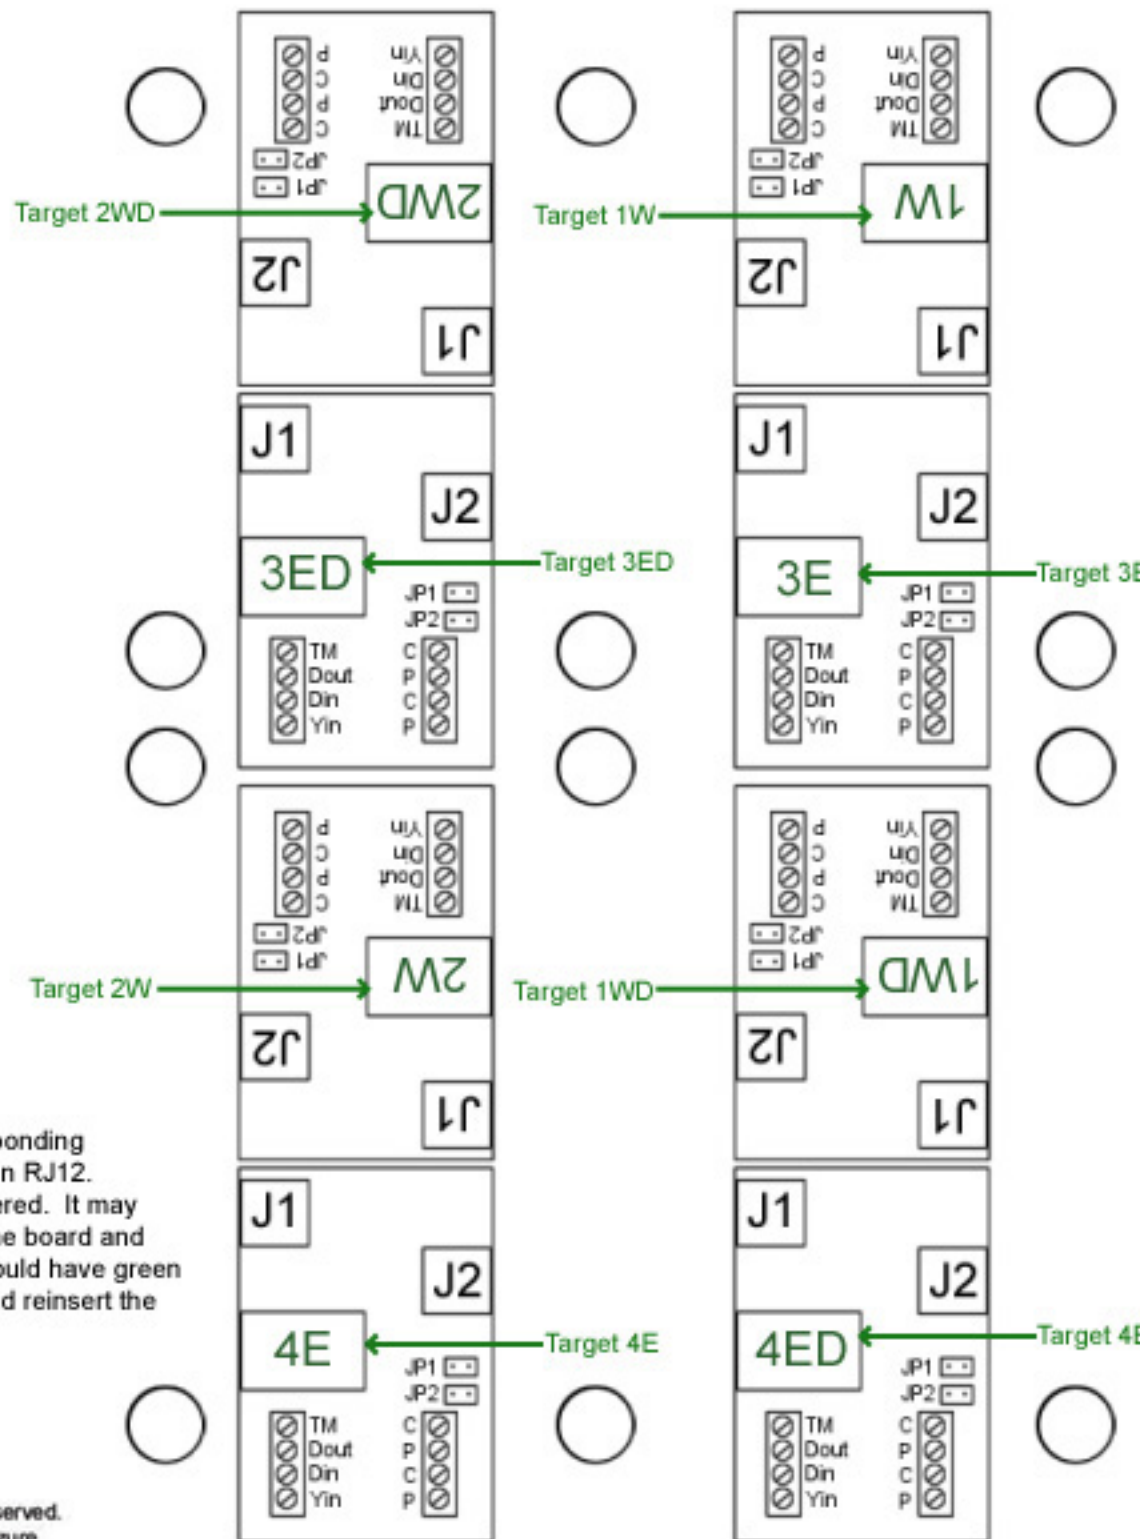


Signal Connection:
Insert RJ-plugs
into sockets

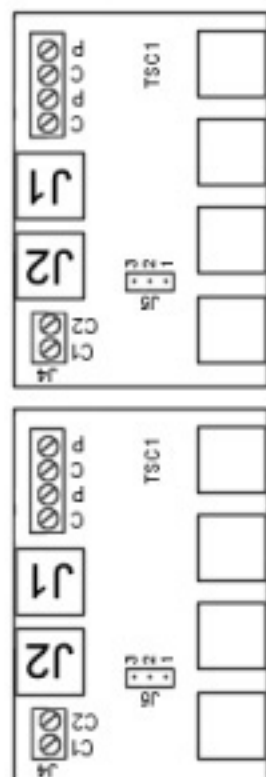

Insert the modular plugs from all the signals into their corresponding sockets. The signal socket is an RJ45 and the signal plug is an RJ12. Make sure the plug "snaps" into the socket straight and centered. It may take more than one try. Once completed, turn on power for the board and check for green lights on all the targets. All of the targets should have green lights at this point. If you don't have a green light, remove and reinsert the plug until you do.